



Symbol for Perfection


VERGE MOWERS SERIES ZF2

Verge Mowers • Series ZF2




The ZF2 is a very robust professional Articular Offset Flail Mower, designed specifically for the maintenance of roadside verges, embankments, ditch sides etc.

Its articulation range of 155° (+90° to -65°) and its hydraulic side-shift of 70 cm (27") give the machine utmost flexibility to work around obstacles such as poles, trees etc. and to deal with variations in ground level.

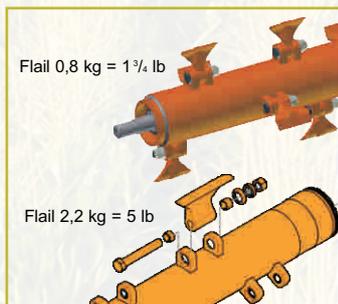

The ZF2 can either be equipped with 0,8 kg (1 3/4 lb) standard flails for finest cut or 2,2 kg (5 lb) optional heavy-duty flails which are less sensitive for obstructions.

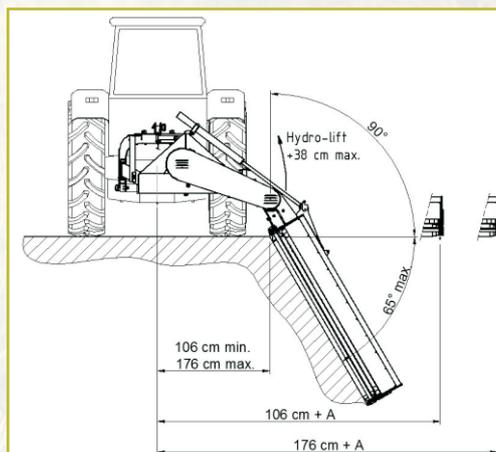

They are fitted to the electronically balanced vibration-free flail rotor with heavy bolts and replaceable steel bushes.

Specifications		ZF2-150	ZF2-180	ZF2-210	ZF2-240
Cutting width	cm/ft	150/4'11"	180/5'11"	210/6'11"	240/7'11"
PTO speed	rpm	1000	1000	1000	1000
Flail rotor speed	rpm	2230	2230	2230	2230
Minimum power requirements*	kW/HP	44 / 60	50 / 68	55 / 75	65 / 88
Flails - std. 0,8 kg = 1 3/4 lb - option 2,2 kg = 5 lb		16	18	22	24
		9	12	12	16
Overall transport width	cm/ft	187 / 6'1"	187 / 6'1"	187 / 6'1"	187 / 6'1"
Tractor 3 pt. linkage	cat.	II	II	II	II
Weight	kg/lbs	890/1960	940/2070	990/2180	1050/2315
Offset from tractor centerline					
Minimum	cm/ft	255/8'4"	285/9'4"	315/10'4"	345/11'4"
Maximum	cm/ft	325/10'7"	355/11'7"	385/12'7"	415/13'7"



To protect the bearings of the rear roller, the bearings are fitted with unique covers to prevent humidity, dust and mud from entering.


*Power requirements depend entirely on the type of work. A PTO shaft with overload protection clutch must be used in case of oversized tractors.

VERGE MOWERS SERIES ZF2



Drive to the flail rotor is transmitted through a 5-fold power belt, which is automatically kept at the right tension. A flexible coupler eliminates peak strokes on the drive system.

A unique large deflection breakaway device ensures maximum protection independently of the offset position.

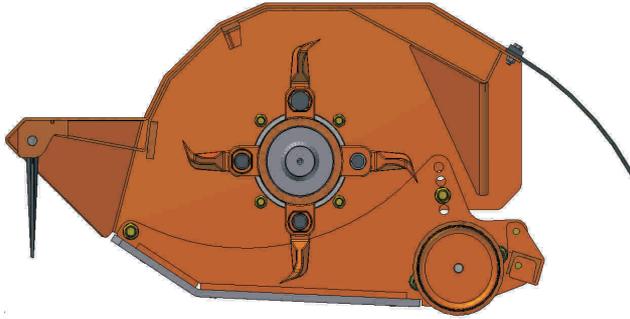


The main body of the cutting head is fitted with a twin skin metal plate construction with reinforcements at key mounting points for utmost security and durability.

Standard configuration

- Heavy duty frame
- Hydraulic side-shift 70 cm (27')
- Overrunning clutch
- Drive through a 5 fold Powerbelt
- Breakaway device
- 0,8 kg (1¾ lb) flails
- Working range +90° to -65°

Available options:
- 2,2 kg (5 lb) flails
- Hydro-Lift

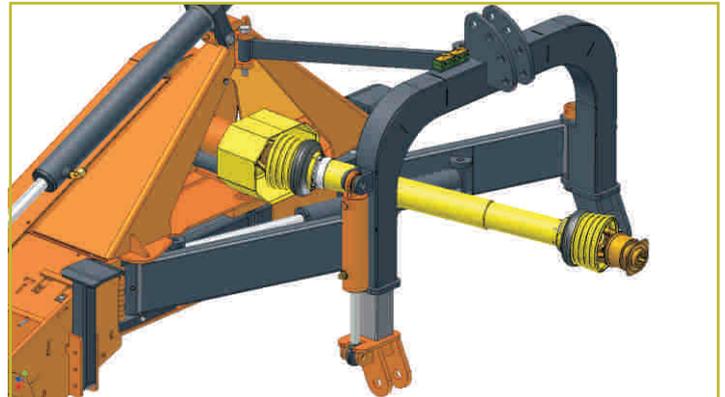

"Hydro-lift" feature

Allows for one sided lifting of the mowing head over ± 35 cm (15½"). This makes it possible to mow shallow ditches with a (too) large mowing head.



All "Perfect" Multi Mowers are also available as front mounted and/ or left hand models.

VAN WAMEL B.V.



Energieweg 1 - P.O. Boxh 4
6658 ZG Beneden-Leeuwen
HOLLAND
Tel. + 31 (0)487-592944
Fax. +31 (0)487-592970
Email: perfect@vanwamel.nl



Technical specifications can be changed without prior notice