



Symbol of Perfection

Mow-Load Combination • Model MLC



- Robust construction
- Compact and manoeuvrable
- Wide range of purposes
- Chops vegetation up to \varnothing 8 cm
- Unloading height 195 cm (6'5")
- Standard configuration includes a hydraulic offset feature
- Trailer equipped with two sets of double floating wheels

Very robust mow-load combination to mow, chop and pick up grass, leaves, prunings and other vegetations in one working pass on different terrains.

In parks, green spaces, camping sites, golf areas and on road sides this machine can be used to take away grass and other vegetations, for example to impoverish the soil.

In vineyards and orchards this allows for a successful control of the increasing scab problem, or to use the prunings for heating or composting purposes.

MOW-LOAD COMBINATIONS

Mow-Load Combination • Model MLC

The flail mower is an independent unit, which is mounted in the main frame.

A rear roller with large diameter over the complete width of the machine ensures an excellent terrain adjustment independently of the trailer, even on uneven grounds.

For transport the flail mower is lifted by means of two hydraulic rams.


To assure the necessary stability and to limit ground pressure, the trailer is equipped with two sets (4) of floating wheels.




Standard configuration:

- Heavy-duty "Perfect" flail mower driven by an extra strong gearbox and V-belts with a springloaded automatic tensioner
- Robust electronically balanced vibration-free flail rotor with large diameter and wall thickness
- 0,8 kg (1¾ lb) "Perfect" special steel flails with flat single cutting edges
- Pullbar with hydraulic offset cylinder
- Unloading height trailer 195 cm (6'5")
- Two sets (4) of floating wheels Ø = 515 mm B = 250 mm
- Rear rake tines which are adjustable in height for a better pick-up and pulverization of thin prunings or prunings that are laying flat

2,2 kg (5 lbs) heavy-duty flails and an optional conversion kit to use the flail mower independently of the trailer are available as an option.



0,8 kg (1¾ lbs) flails (std)

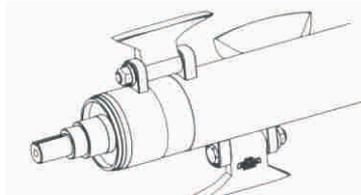

2,2 kg (5 lbs) flails (option)



Rear rake tines



Technical specifications		MLC-150	MLC-180
Cutting width	cm/inch	150/4'11"	180/5'11"
PTO speed	rpm	540	540
Flail rotor speed	rpm	2100	2100
Min. power required at 540 rpm	kW/HP	40/55	52/70
Flails	- 0,8 kg (1¾ lbs) standard	24	28
	- 2,2 kg (5 lbs) option	16	18
Total width	cm/inch	170/5'7"	200/6'7"
Tipping height	cm/inch	195/6'5"	195/6'5"
Storage capacity	m ³	± 3	± 3½
Weight	kg/lbs	1350/2970	1500/3300

VAN WAMEL B.V.



Energieweg 1 - P.O. Box 4
6658 ZG Beneden-Leeuwen
HOLLAND
Tel. + 31 (0)487-592944
Fax. +31 (0)487-592970
Email: perfect@vanwamel.nl



Technical specifications can be changed without prior notice